RAPTOR

INDICATIVE **CONSUMPTION**

INDICATIVE CONSUMPTION BED LINER

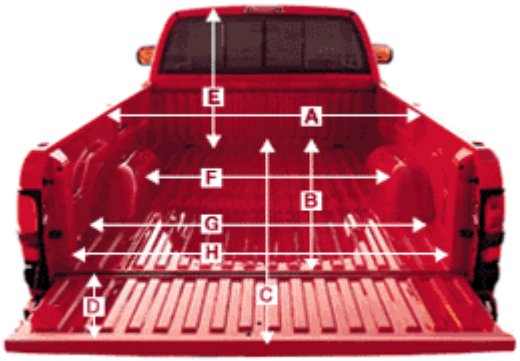

Description in inches		6,5’	8’
A	Maximum width at outside of fender	78,0	78,0
B	Overall length of box	82,1	101,2
C	Front of box to end of open tailgate	98,6	118,4
D	Tailgate height	17,0	17,0
E	Box floor to top of cab	42,5	42,5
F	Width between wheelhouses	49,3	49,3
G	Maximum width at floor	64,3	64,3
H	Maximum width opening	63,2	63,2

Regular Pickup Bed ≈ **4L**
400-500 microns build

INDICATIVE CONSUMPTION FULL OVERSPRAY

Niva

Length	3720
Width	1620
Height	1640
Clearance	220

8L

UAZ

Length	4025
Width	1785
Height	2075
Clearance	300

10L

Toyota Land Cruiser 105

Length	4890
Width	1940
Height	1890
Clearance	200

12L

Toyota Tundra

Length	6266
Width	2029
Height	1925
Clearance	259

16L

* - 500-700 microns build

INDICATIVE CONSUMPTION BED LINER

Conventional Shutz Gun	Application	Flash Time min	Wet Film Build, µ	Build checked at 7-days	Coverage per litre, m²	Coverage per litre, ft²	Tack Free, min	Touch Dry, min
1-Coat	Light		≈ 150µ	≈ 120µ	7.90	85,00	30	60
1-Coat	Medium		≈ 275µ	≈ 230µ	4.20	45,00	40	90
1-Coat	Heavy		≈ 475µ	≈ 380µ	2.40	26,00	50	100
2-Coats	Light+Light	60		≈ 215µ	3.95	42.50	30	60
2-Coats	Medium+Light	60		≈ 330µ	3.02	32.50	30	90
2-Coats	Heavy+Light	60		≈ 460µ	2.57	27.75	30	90
2-Coats	Light+Medium	60		≈ 370µ	3.02	32.50	40	90
2-Coats	Medium+Medium	60		≈ 475µ	2.10	22.50	40	90
2-Coats	Heavy+Medium	60		≈ 585µ	1.65	17.75	40	90
2-Coats	Light+Heavy	60		≈ 460µ	2.57	27.75	50	100
2-Coats	Medium+Heavy	60		≈ 560µ	1.65	17.75	50	100
2-Coats	Heavy+Heavy	60		≈ 650µ	1.20	13.00	50	100
3-coats	Light+Light+Light	60		≈ 320µ	2.63	28.30	30	75
3-coats	Medium+Medium+Light	60		≈ 615µ	1.81	19.44	30	75
3-coats	Heavy+Medium+Light	60		≈ 715µ	1.61	17.33	30	110
3-coats	Medium+Medium+Medium	60		≈ 730µ	1.40	15.00	40	100
3-coats	Heavy+Medium+Medium	60		≈ 790µ	1.20	12.90	40	100

Application conditions:

Ambient	20^0C
Air Pressure	3.5 Bar, 50 PSI
Distance- Light	30-40 cm
Distance- Medium	50-60 cm
Distance- Heavy	50-60 cm